

OUTSTANDING RELIABILITY, IMPRESSIVE COLOR QUALITY, EFFICIENT DESIGN

The imageRUNNER ADVANCE C3500 Series is designed to deliver reliable color performance with a compact and efficient design. These intelligent systems work seamlessly with Canon's integrated software and services, making it an outstanding choice for small to medium-size businesses and departments within large organizations.

Print up to 30 ppm (BW/Color)

Scan up to 160 ipm (300 dpi) (BW, color, duplex)

Print up to 12" x 18"

2,300-sheet maximum paper capacity



Workflow Efficiency

- An intuitive user interface with a large, responsive, color touchscreen with smartphone-like usability helps make it easy to carry out tasks.
- My ADVANCE enables users to have a unique, customized experience that's tailored to their specific workflow needs. Settings, such as display language, initial log-in screen, and accessibility options, can be synchronized across multiple devices for consistency.
- Canon's MEAP platform supports a range of integrated solutions designed to help simplify workflow and achieve a holistic business solution.
- Scalable support for mobile and flexible work styles can help increase efficiency by allowing workers to capture or print documents and access certain cloud applications.¹
- Scan and convert documents to Searchable PDF, Microsoft® Word, and Microsoft PowerPoint® files through a single-pass, duplexing document feeder that holds up to 150 originals.
- Intelligent features, such as motion sensor technology to wake the device from Sleep mode and the ability to remove blank pages when scanning, can help maximize productivity.

Security²

- Control device access by using the standard Universal Login Manager application for authentication.
- Help limit unauthorized distribution of sensitive information with an array of standard and optional document security features.
- Help facilitate information privacy and security by controlling access with IPsec, port filtering capabilities, and SSL technology.

Cost Management

- The ability to apply print policies, monitor output, and restrict usage by user can help reduce unnecessary printing, enable cost recovery, and help save money on paper and toner.
- Tight integration with a variety of output management solutions, such as optional uniFLOW, provides the ability to carry out detailed tracking, reporting, and cost analysis.
- Quality and reliability, combined with remote diagnostics, contribute to maximizing uptime and can help reduce time spent by IT to resolve issues.
- Consistent user operation, paired with remote and centralized fleet management, can help simplify IT management of a single device or a fleet of devices.



Device and Fleet Management

- The ability to preconfigure devices makes installation easy, and fleet management is simplified with the ability to synchronize settings across multiple compatible devices.
- Canon's device management tools provide a centralized point of control across a fleet of devices, including the ability to check device status and consumables, turn off devices remotely, capture meter readings, and manage address books and printer drivers.
- Standard genuine Adobe® PostScript® and PCL® support integration with enterprise applications and legacy systems to help streamline business processes.


Quality and Reliability

- Canon's signature reliability and engine technologies contribute to high-quality output to help meet the needs of busy departments.
- Outstanding imaging technologies and toner allow for consistently striking images using Canon's V² color profile and 1200-dpi print resolution.
- Designed to achieve maximum uptime with status notifications to help keep supplies replenished, intuitive user maintenance videos, and automatic job rerouting (with optional solutions).

Sustainability

- Fusing technologies, pQ toner, and selectable Sleep mode settings help achieve low energy consumption.
- Help minimize waste with default two-sided printing, the Secure Print feature, and the ability to hold print jobs, preview them, and change print settings at the device so you can achieve the results you want the first time.
- ENERGY STAR® certified and rated EPEAT® Gold.³

Configuration

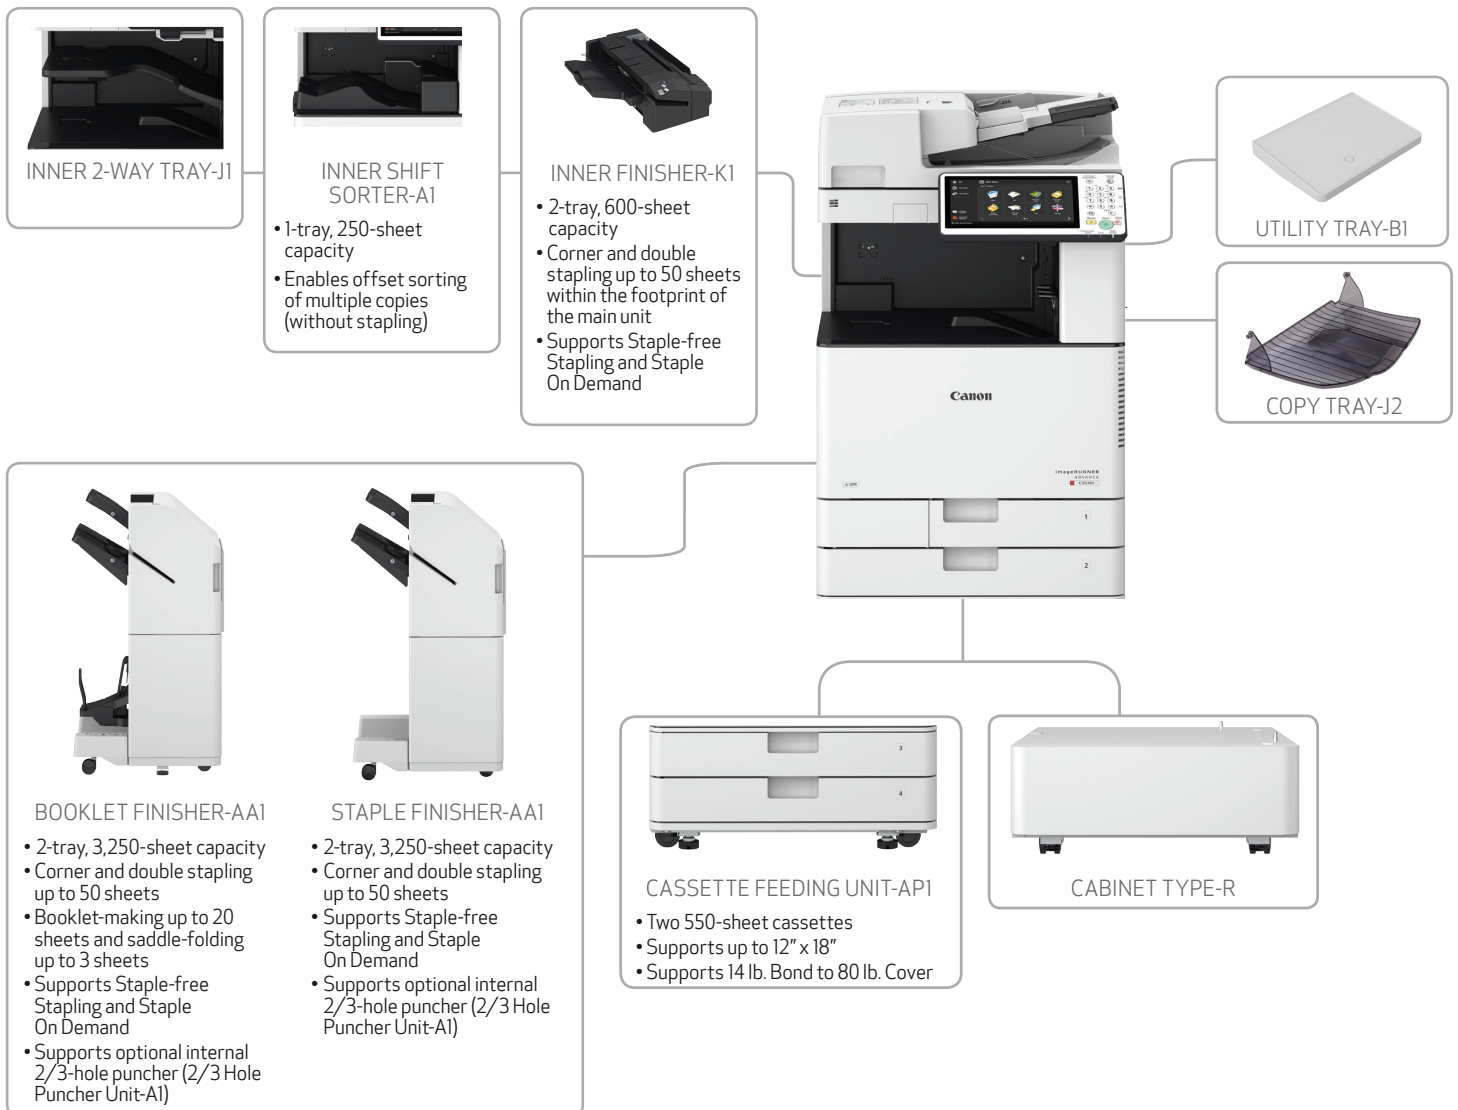

Main Unit

Type

Color Laser Multifunctional

Core Functions

Standard: Print, Copy, Scan, Send, Store

Optional: Fax

Processor

Canon Dual Custom Processor (Shared)

Control Panel

10.1" TFT LCD WSVGA Color Flat-panel

Memory

3.0 GB RAM

Hard Disk Drive

Standard: 250 GB

Interface Connection

Network: 1000Base-T/100Base-TX/10Base-T,
Wireless LAN (IEEE 802.11 b/g/n)

Others

Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host),
USB 2.0 x1 (Device)

Optional: Serial Interface, Copy Control Interface

Paper Capacity (LTR, 20 lb. Bond)

Standard: 1,200 Sheets

Maximum: 2,300 Sheets

Paper Sources (LTR, 20 lb. Bond)

Standard: Dual 550-sheet Paper Cassettes,
100-sheet Stack Bypass

Optional: Dual 550-sheet Paper Cassettes
(CASSETTE FEEDING UNIT-API),

Paper Output Capacity (LTR, 20 lb. Bond)

Standard: 250 Sheets

Maximum: 3,450 Sheets
(with External Finisher and Copy Tray)

Finishing Capabilities

Standard: Collate, Group

With Inner Shift Sorter: Collate, Group, Offset

With Inner Finisher: Collate, Group, Offset, Staple, Hole Punch,
Staple-Free Staple, Staple On Demand

With External Finishers: Collate, Group, Offset, Staple, Booklet,
Staple-Free Staple, Staple On Demand,
Hole Punch (Optional)

Supported Media Types

Paper: Thin, Plain, Recycled, Color, Heavy,
Cassettes: Pre-punched, Bond, Transparency,
(1/2): Envelope

Stack Bypass: Thin, Plain, Recycled, Color, Heavy,
Pre-punched, Labels, Bond, Coated,
Transparency, Tracing, Envelope

Cassette Feeding Unit-API: Thin, Plain, Recycled, Color, Heavy,
Pre-punched, Bond, Transparency

Supported Media Sizes

Paper: Letter, Executive, Statement-R, Envelope
Cassette 1: [No.10 (COM10), DL, ISO-C5], Custom Size
(5-1/2" x 7-1/8" to 11-3/4" x 8-1/2")

Paper: 12" x 18", 11" x 17", Legal, Letter, Letter-R,
Cassette 2: Executive, Statement-R, Envelope
[No.10 (COM10), Monarch, DL], Custom
Size (5-1/2" x 7-1/8" to 12" x 18")

Stack Bypass: 12" x 18", 11" x 17", Legal, Letter, Letter-R,
Executive, Statement, Statement-R,
Envelope [No.10 (COM10), Monarch,
DL, ISO-C5], Envelope Custom Size
(3-7/8" x 3-7/8" to 12-5/8" x 18"),
Custom Size (3-7/8" x 5-1/2" to
12-5/8" x 18"), Free Size (3-7/8" x 5-1/2"
to 12-5/8" x 18")

Cassette Feeding Unit-API: 12" x 18", 11" x 17", Legal, Letter, Letter-R,
Executive, Statement-R, Custom Size
(5-1/2" x 7-1/8" to 12" x 18")

Supported Media Weights

Cassettes: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Stack Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Duplexing: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Print/Copy Speed (BW and Color)

C3530i: Up to 30 ppm (Letter); Up to 20 ppm
(Letter-R); Up to 15 ppm (Legal);
Up to 15 ppm (11" x 17")

C3525i: Up to 25 ppm (Letter); Up to 20 ppm
(Letter-R); Up to 15 ppm (Legal);
Up to 15 ppm (11" x 17")

Warm-up Time

From Power On: 34 Seconds

From Sleep Mode: 10 Seconds

Quick Startup Mode: 10 Seconds⁴

Mode:

Dimensions (W x D x H)

22-1/4" x 29-1/4" x 45-1/5" (565 mm x 742 mm x 1148 mm)⁵

Installation Space (W x D)

Basic: Stack Bypass + Cassette drawers open:
38-1/2" x 44-1/4" (978 mm x 1123 mm)⁶

Fully Configured: 63-3/4" x 44-1/4" (1620 mm x 1123 mm)⁶

Weight

Approx. 213.9 lb. (97 kg)⁷

Print Specifications

Print Resolution (dpi)

1200 x 1200

Standard Page Description Languages

UFR II, PCL[®]6, Adobe[®] PS[®]3

Direct Print

Available from USB, Advanced Box, Remote UI,
and Web Access⁸

Supported File Types

PDF, TIFF, JPEG, EPS, XPS

Printing from Mobile Devices and Cloud-based Services

A range of software and MEAP-based solutions are available to provide printing from mobile devices or Internet-connected devices and cloud-based services depending on your requirements.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,
Andalé Mono WT J/K/S/T (Japanese,
Korean, Simplified and Traditional
Chinese),⁹ Barcode Fonts¹⁰

PS fonts: 136 Roman

Operating System¹¹

UFR II/PS: Server 2003/Server 2003 R2/Windows
Vista[®]/Server 2008/Windows[®] 7/Server
2008 R2/Windows 8/Server 2012/
Windows 8.1/Server 2012 R2/Windows
10/Server 2016, MAC OS X (10.7 or later)

PCL: Server 2003/Server 2003 R2/Windows
Vista/Server 2008/Windows 7/Server
2008 R2/Windows 8/Server 2012/
Windows 8.1/Server 2012 R2/Windows
10/Server 2016

Copy Specifications

First-Copy-Out Time (LTR)

As fast as 5.9 seconds (BW)/8.2 seconds (Color)

Multiple Copies

Up to 999 copies

Magnification

25%-400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper
Setting, Previous Settings, Favorite Settings, Finishing,
Two-Sided, Density Adjustment, Original Type Selection,
Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-Sided Original, Finishing,
Booklet, Job Build, N on 1, Add Cover, Insert Sheets,
Different-Size Originals, Density Adjustment, Original
Type Selection, Transparency Cover Sheets, Page
Numbering, Copy Set Numbering, Sharpness, Erase
Frame, Secure Watermark, Print Date, Shift, Gutter,
Print & Check, Negative/Positive, Repeat Images,
Job Done Notice, Mirror Image, Copy ID Card, Detect
Feeder Multi Sheet Feed, Free Size Original, Adjust One-
Touch Color, Color Balance, Area Designation

Scan Specifications

Type

Single-pass Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

150 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

Document Feeder Supported Media Weights

BW Original: 13 lb. Bond to 58 lb. Cover (50 to 157 g/m²)

CL Original: 17 lb. Bond to 58 lb. Cover (64 to 157 g/m²)

Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2 kg)]

Pull Scan

Color Network ScanGear2 for both Twain and WIA

Supported OS: Windows Vista/7/8/8.1/10/
Server 2008/Server 2008 R2/
Server 2012/Server 2012 R2

Scan Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to
mobile devices and cloud-based services depending on
your requirements.

Scan Speed (LTR)

Single-sided Scanning (BW/Color):

80 ipm (300 dpi)/51 ipm (600 dpi)

Double-sided Scanning (BW/Color):

160 ipm (300 dpi)/51 ipm (600 dpi)

Send Specifications

Destination

Email/Internet Fax (SMTP), SMB, FTP, WebDAV, Mail
Box, Super G3 Fax (Optional), IP Fax (Optional)

Address Book

LDAP (2,000)/Local (1,600)/Speed Dial (200)

Send Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Communication Protocol

File: FTP, SMB, WebDAV

Email/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF (Compact, Searchable,
Apply policy, Optimize for Web, PDF
A/1-b), XPS (Compact, Searchable),
Office Open XML (PowerPoint[®], Word)

Optional: PDF (Trace & Smooth, Encrypted),
PDF/XPS (Digital Signature)

Universal Send Features

Original Type Selection, Two-Sided Original, Book to Two
Pages, Different-Size Originals, Density Adjustment,
Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed
Send, Preview, Finished Stamp, Job Done Notice, File
Name, Subject/Message, Reply-To, Email Priority, TX
Report, Original Content Orientation, Skip Blank Originals,
Detect Feeder Multi Sheet Feed

Fax Specifications

Maximum Number of Connection Lines

2

Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

Sending/Recording Size

Statement-R to 11" x 17"

Fax Memory

Up to 30,000 Pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 Dials

Sequential Broadcast

Max. 256 Addresses

Memory Backup

Yes

Fax Features

Original Type Selection, Two-Sided Original, Book to Two Pages, Different-Size Originals, Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Sender's Name (TTI), Select Line, Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

Store Specifications

Mail Box Simple (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV

Supported

Client PC: Windows (Windows Vista/7/8/8.1/10)

Concurrent Connections (Max.)

SMB: 64

WebDAV: 3 (Active Sessions)

Advanced Box Available Disc Space

Approx. 16 GB

Advanced Box Features:

Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB

Security Specifications

Authentication

Standard: Universal Login Manager, User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in

Optional: uniFLOW

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated)

Optional: Hard Disk Drive Removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

Document

Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration

Optional: Encrypted PDF, Encrypted Secure Print, User and Device Signatures, Secure Watermarks, Document Scan Locking

Environmental Specifications

Operating Environment

Temperature: 50 to 86 °F

Humidity: 20 to 80 % RH (no condensation)

Power Requirements

C3530i/C3525i: 120-127V AC 60 Hz, 7.5 A

Plug (Main Unit)

C3530i/C3525i: NEMA 5-15P

Power Consumption

Maximum: Approx. 1.5 kWh

Standby: Approx. 44.1 W

Sleep Mode: Approx. 0.8 W¹²

Typical Electricity Consumption (TEC) Rating:

1.2 kWh (C3530i)

1.0 kWh (C3525i)

Standards

ENERGY STAR® Certified
Rated EPEAT® Gold³

Consumables

Toner

GPR-53 Toner¹³

Toner Yield (Estimated @ 5% Coverage)

Black: 36,000 Images

Color (C,M,Y):¹³ 19,000 Images

Footnotes

- ¹ Subscription to a third-party cloud service required. Subject to third-party cloud service providers' terms and conditions.
- ² Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance.
- ³ For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net.
- ⁴ Time from device power-on to when copy jobs can be programmed.
- ⁵ Includes main unit and either Cassette Feeding Unit-API, or Cabinet Type-R.
- ⁶ Includes main unit and either Cassette Feeding Unit-API or Cabinet Type-R and Staple/Booklet Finisher-AA1.
- ⁷ Includes main unit, ADF consumables, and Cassette Feeding Unit-API.
- ⁸ PDF print from Web sites is supported.
- ⁹ Requires the optional PCL International Font Set-A1.
- ¹⁰ Requires the optional Barcode Printer Kit-D1.
- ¹¹ Other operating systems and environments, including AS/400, UNIX, Linux and Citrix, may be supported. Some solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.
- ¹² 0.8 W sleep mode not available in all circumstances due to certain settings.
- ¹³ GPR-53L Toner also available for Color (C, M, Y). Yield (estimated @ 5% coverage) is 8,500 images.

USA.CANON.COM



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Google Cloud Print™ is either a registered trademark or trademark of Google Inc. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, MEAP, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. iF Design Award 2017 is for third generation imageRUNNER ADVANCE Multifunction office systems. uniFLOW is a registered trademark of NT-ware Systemprogrammierung GmbH. Adobe® and PostScript® 3™ are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft® and PowerPoint® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. PCL® is a registered trademark of Hewlett-Packard Company. All other referenced product names and marks are trademarks of their respective owners. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2017 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

